

MODEL 2139 PRINT & APPLY



For Cartons Pallets!

MODEL 2139 PRINT & APPLY SPECIFICATIONS

- The Model 2139 Printer Applicator thermal transfer or direct transfer imprints and apples labels around any corner or two labels on adjaent panels utilizing a vacuumized air drum.
- One to one print and apply allows for the immediate application of each label as it is printed. Pre-printed labels can also be applied utilizing a Model 2015 as the label dispenser.
- A sturdy swing arm can be configured for cartons or pallets, labeling any two adjacent panels or any side requiring two labs.
- The heavy duty H-frame mounting stand (see insert on front side) can be bolted to the foor for stability.

Dimensions: Height: 66" Wi dth: 46.5" Length: 62.75"

Weight: 500 lbs.

Label Di mensions: Label Width: Up to 8.8"

Label Length: Up to 24"

Print Area: Up to 8.5" wide

Label Packaging: 8" O.D. Roll s Maxi mum

on 3" I.D. Cores

Dependent upon printer

Dispense Speed: Up to 12" per second

Dependent upon printer and label siz

Label Placement Accuracy: Up to +/- 1/32"


Electrical: 115 Volts A C, 60 Hz, 5 Am ps

220 Volts A C, 50 Hz - Optional

Air (A s Needed): 4 cfm at 60 psi for most applications

Printers Available: Table top printers fromvarious manufacturers

available

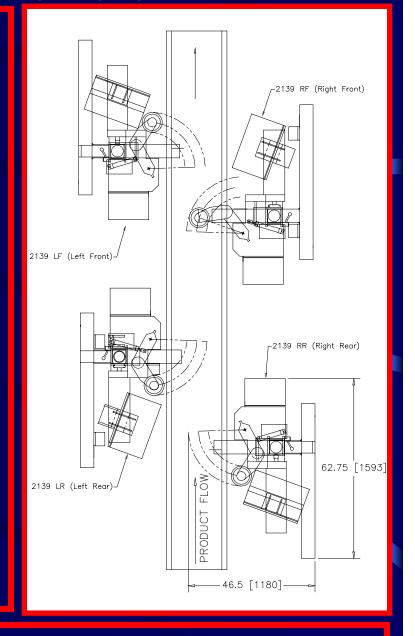

QLC 537 Progress Drive

Hartland, WI. 53209 Phone: (262) 367-1 400 Fax: (262) 367-1 405 Toll Free: (800) 837-1 309 Email: info@glc-labeling.com