

3138-TS Printer Applicator Specifications

Dimensions:

Height: 23.88" (606.62 mm)
Length: 30.52" (775.12 mm)
Width: 26.97" (684.99 mm)

Weight:

165 lbs. (75 kg)

Standard Label Dimensions:

Label Width: Up to 7.2" (183 mm)
Label Length: Up to 7" (178 mm)
(Printer dependent)

Dispense Speed:

Up to 16" (305 mm) per second
depending on printer and label size

Label Placement Accuracy:

+/- 1/32" (.8 mm)

Electrical:

115 Volts AC 60 Hz 5 Amps.
220 Volts AC 50 Hz 2.5 Amps.

Air:


4 cfm at 90 psi for most applications

Options:

Most O.E.M. print engines
17" (432 mm) powered unwind
Label on pad detection
Air-Blow conversion
90° swing tamp configuration
Dual Action Tamp (DAT) configuration
Consult factory for additional options.



For more information
QLC, Inc.
537 Progress Drive
Hartland WI 53029
(800) 837-1309
www.QLC-Labeling.com

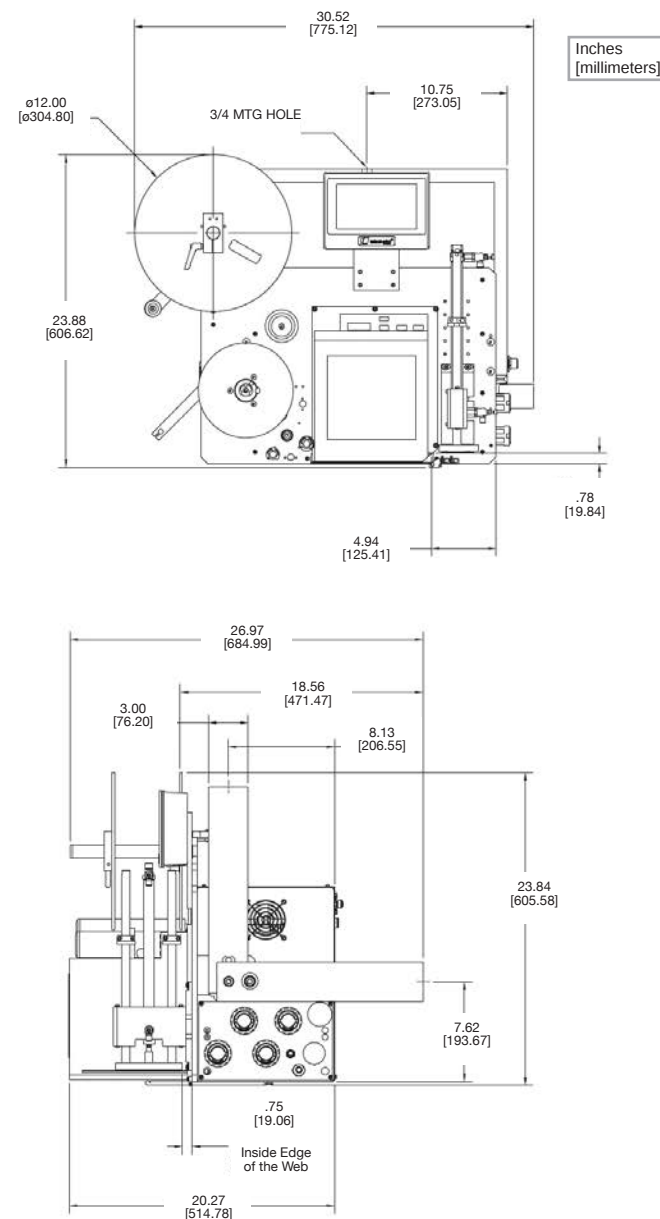

Contact QLC (800) 837-1309
Visit www.QLC-Labeling.com



3138-TS

Printer Applicator

- Available at a lower cost
- New split cover for easier access
- Easier tamp assembly field kit installation
- New pneumatic panel for easy component replacement
- Redesigned electronics tray
- 1" to 10" (25.4 mm to 254 mm) adjustable tamp assembly
- Ambidextrous parts
- RFID configurable

Model 3138-TS

The **Label-Aire® Model 3138-TS Printer Applicator** works hard for you... so you don't have to.


The Model 3138-TS Printer Applicator delivers on its promise of accuracy, reliability, and ease of use. That translates into lower operating costs and increased productivity for your business.

The 3138-TS is Label-Aire's most advanced printer applicator which features New Generation technology making it the ideal choice for the most demanding applications. Advanced features include automatic setup with multiple programmable label pages for easy change-overs to labels of different sizes, rate compensation for improved label placement accuracy, and advanced user-configurable I/O connectivity. The 3138-TS's newest features consist of a split cover for easier access, easier tamp assembly field kit installation, a redesigned electronics tray for top access, a new pneumatic panel for easy component replacement, 1" to 10" (25.4 mm to 254 mm) adjustable tamp assembly with stainless steel rods and locking collars, ambidextrous parts—unit can be reassembled in opposite hand configuration, and the 3138-TS is RFID configurable. All these handy features greatly simplify setup and changeovers. The 3138-TS is just as tough as it is advanced. Its rugged stainless steel and anodized aluminum construction is corrosion resistant providing long-lasting durability and maintenance-free operation in the most hostile eTSironments. Options include a 17" (432 mm) powered unwind, label on pad detection, Air-Blow labeling coTSersion, 90° swing tamp configuration, and Dual Action Tamp (DAT) configuration. Like all Label-Aire printer applicators, the 3138-TS is compatible with most O.E.M. printers.

Put this most advanced printer applicator to work for you all day, every day. The Model 3138-TS Printer Applicator is built to meticulous quality standards and designed to withstand the most intense operation.

3138-TS Advanced Features	
Automatic setup	Includes multiple programmable label pages for easy change-overs to different label sizes.
Split cover	Allows easier access to electronics.
Pneumatic panel	For easy component replacement.
Ambidextrous parts	Allows easy reassembly in opposite hand configuration.
1" to 10" (25.4 mm to 254 mm) adjustable tamp assembly	Consists of steel rods, locking collars, and heavy duty air cylinder for 24/7 label application.
HMI color touch screen	Touch screen allows easy set-up and adjustability.
Flash memory	Allows easy download of system software updates.
Rate compensation	For improved label placement accuracy.
Advanced I/O	User-configurable for system output.
Stepper rewind	Comes standard for waste take up.
17" (432 mm) powered unwind	Optional configuration is geared for high-speed, heavy duty operation.

beverage, cd / dvd, coupon / promotional, dairy, direct mail, durable goods, food, health & beauty, nutraceutical, pharmaceutical, tamper-evident labeling

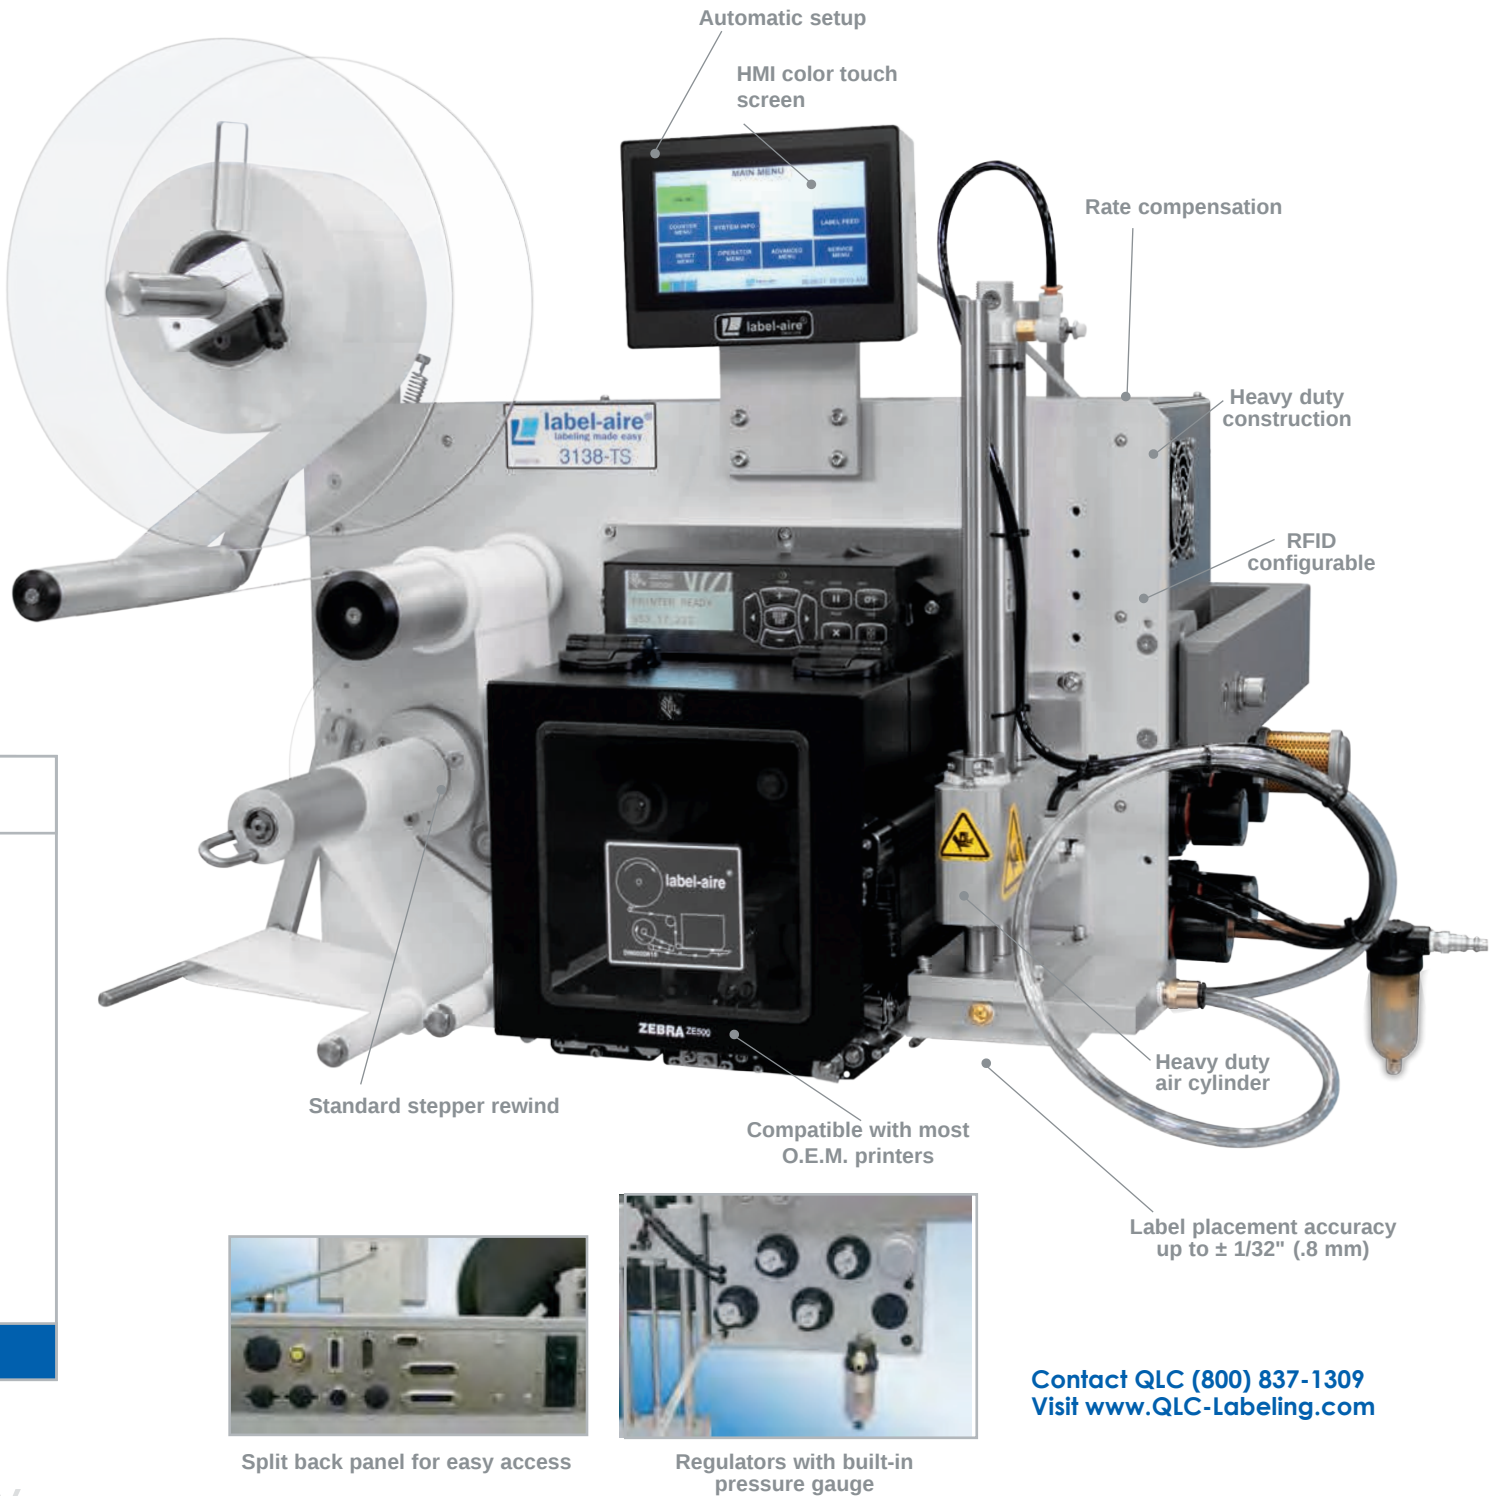

Contact QLC (800) 837-1309
Visit www.QLC-Labeling.com